

PM-2icx Power Monitor - Two Fans

PM-icx unit is our improved version of our Patented fan power monitor for use in the commercial catering section to meet BS6173:2001.

This product is available in a number of versions, from 1 to 4 fans and 10 to 20 Amp FLC single and three phase.


Each unit has inputs for remote knock-off, fire alarm and an ancillary input. They come complete with a 5A MCB on/off rocker switch and touch pad control with audible alarm and LED indication.



Model Type	Model	Description
	PM-2icx	Power Monitor - twin fan

Technical Data		
Power supply		240Vac 50Hz (L,N,& E)
Number of fan channels		Two
Current rating of monitor		10 or 20Amp
Voltage range of fans		Single phase (240Vac) or three phase 415Vac
Gas valve output		240Vac (L,N & E)
Auxiliary output		240Vac (L,N & E) or volt-free

Typical Application - Supply & Extract Fan Canopy

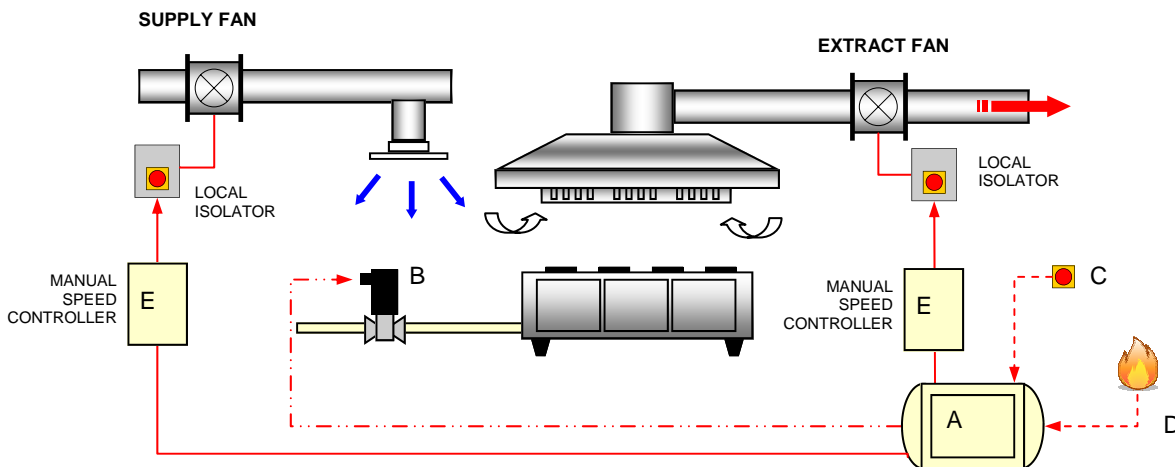

- A = PM-1icx Power Monitor
- B = Gas Valve
- C = Remote knock-off
- D = Fire alarm
- E = Manual speed controller